


OUTDOOR-IP3


OUTDOOR FLOODLIGHT CAM/PIR 2-WAY AUDIO


QUICK GUIDE

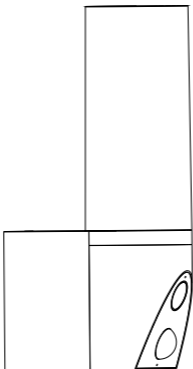

What's in the box

Consult the checklist below for all components.



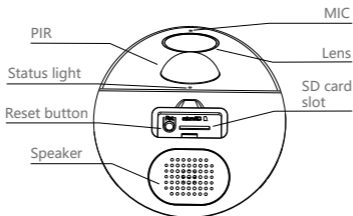

Power	AC 100~240V
-------	-------------

- | | |
|--------------|--|
| Status light | <ul style="list-style-type: none">• Solid red light on: network is malfunctional• Blinking red light: wait for network connection (slowly blinking) connecting the network (fast blinking)• Solid blue light on: camera is working correctly |
|--------------|--|


Microphone	Capture sounds for your video
------------	-------------------------------

SD card slot	Support local SD Card storage (Max.128GB)
--------------	---


Reset	Press and hold the 'RESET' for 5 seconds to reset the device (if you have modified settings, they will return to factory defaults)
-------	--

Light	Turn the light on/off manually or automatically
-------	---

- Step 1** First turn off the power breaker at your fuse box for your device.
And confirm to power off everything again.



Step 2



1. Loosen the screws of ① and connect the power cable to the terminal. And then tighten the screws of ①. Make sure that one side of white cable ② is installed within the bracket, otherwise there will be water leakage.




WARNING

Please confirm that you have turned off your power breaker and then connect terminal with cable.



2. Fix the mounting bracket to the wall with bracket screws.


Step 3

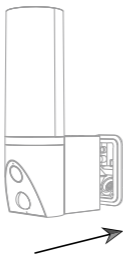

Install the camera into the bracket along the direction of the bracket.

After the camera is installed in the bracket, fix them with screws.

* (Optional) You can adjust the horizontal angle between 0 to 120 degrees by App.



NOTE:

When after installing your camera, turn on the power breaker.

Download

CrowPro Alarm is available for both iOS and Android OS. Search the name 'CrowPro Alarm' in App Store or Google Play.

Support



Add device

Log in the CrowPro Alarm, select "IP Cameras", select "Add Device", and add the smart camera to the App according to the screen tips(Make the smart camera close to the router when configuring).



NOTE:

If you need to re-select the WiFi network, please press and hold the "RESET" button for 5 seconds, the device will restart, and the indicator will be flashing red.

Function

Lighting Control

You can turn on or off the light, or adjust the brightness by App.

Two-way Audio

You can see visitors and hear the isounds by App, which are captured by the camera.

PIR

When someone passes by, an alarm will be triggered and sent to your App of phone.

You can turn on the light alarm on App, so that the light will be on automatically when there is a visitor comes out in the evening.

Record

Using SD card or activating the Cloud-Storage Service to keep recording for every moment.

Day & Night

You can set up a schedule for lighting so that you can get a clear view in the evening.



Daytime



Night



support@crow.co.il

www.thecrowgroup.com